


11 1400

Handkreissägen + Lamello
Portable circular saws + Lamello



- > Wechselzahn
- > Alternate top bevel

MASCHINE · MACHINE

Für Handkreissägen, Tauchsägen, Tischkreissägen, Kappkreissägen.

For portable circular saws, table saws, bench saws, cross-cut saws.

✓ OPTIMAL · OPTIMAL ✓ GUT · GOOD ✓ MÖGLICH · POSSIBLE

✓		Weichholz, Hartholz, Exotenholz, Quer	Soft wood, hard wood, and exotic wood across the grain
✓		Weichholz, Hartholz, Exotenholz, Längs	Soft wood, hard wood, and exotic wood along the grain
✓		Leimholz, Tischler- und Furniersperrholz, Schichtholzplatten	Bonded wood, blockboard and veneer plywood, laminated wood
✓		Spanplatten, Hartfaserplatten, Platten ohne Belag LDF, MDF, HDF	Chipboard, hard fibre board, boards without laminate LDF, MDF, HDF
✓		Kunststoffe, Plexiglas, Duro- und Thermoplaste	Plastics, plexiglass, acrylics, duro- and thermoplastics
✓		Spanplatten, Hartfaserplatten Kunststoff beschichtet/furniert, MDF, HDF	Chipboard, hard fibre board, plastic-coated/veneered, MDF, HDF
✓		Furniere	Veneers
✓		Profileleisten	Profiled wood
✓		Mineralische/acrylgebundene Massivplatten/Küchenplatten: Corian®, Noblan®, Hi-Macs®, Staron®, Rausolid®, Varicor®	Mineral/acrylic bound solid boards/kitchen worktops: Corian®, Noblan®, Hi-Macs®, Staron®, Rausolid®, Varicor®
✓		HPL-Duroplastische Schichtstoffplatten/Fassadenplatten: Trespa®, Resopal®, Duropal®, Formica®, Kronospan®, Decodur®	HPL High-Pressure-Laminate solid boards/façade panels: Trespa®, Resopal®, Duropal®, Formica®, Kronospan®, Decodur®
✓		Gips-Zement-Steinwollplatten, Eternit, GFK, CFK, HPL, Mineralwerkstoffe	Gypsum/Cement fibre boards, Rockwool, Eternit, GRP, CFK, HPL, Mineral material

ANWENDUNG · APPLICATION

Niedere Zähnezahl: Holz, Leimholz, Spanplatten roh.

Mittlere Zähnezahl für: Holz, Leimholz, Tischplatten, Spanplatten roh, Spanplatten einseitig beschichtet / furniert.

Hohe Zähnezahl für: Spanplatten roh, Spanplatten 1- und 2-seitig beschichtet / furniert.

Kunststoffe, Thermoplaste.

Low number of teeth: Wood, laminated wood, coarse chipboard.



Average number of teeth for: Wood, laminated wood, tabletops, coarse chipboard, chipboard with coating / veneer on one side.

High number of teeth for: Coarse chipboard, chipboard that is coated/veneered on 1 and 2 sides.

Plastics, thermoplastics.

Lamello-Nebenlöcher **NL 2 / 4,5 / 30 + NL 4 / 5 / 36** gesenkt 90°, mit Bohrung 22,00 mm

Pin holes Lamello **NL 2 / 4,5 / 30 + NL 4 / 5 / 36** countersunk 90°, with bore 22,00 mm

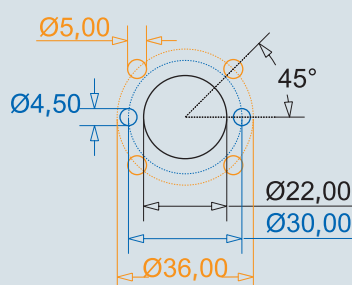


Film
Movie



Handkreissägen + Lamello
Portable circular saws + Lamello

11 1400

Bestseller – preisreduziert · Bestseller – price reduced

Art.								
11 1400 100 010	• 100	2,6/1,6	12	30 WZ	10°	-	-	
11 1400 100 020	• 100	2,6/1,6	22/20	30 WZ	10°	Lamello	-	
11 1400 100 030	• 100	3,97/2,8	22	6 WZ	20°	Lamello	-	
11 1400 100 040	• 100	3,97/2,8	22	12 WZ	20°	Lamello	-	
11 1400 105 010	• 105	2,6/1,6	22/20	30 WZ	10°	-	-	
11 1400 120 010	• 120	2,4/1,4	22	24 WZ	15°	Lamello	-	
-	• 120	1,8/1,2	20	12/28/44 WZ	-	Siehe/See Art. 11 1425 Seite/Page 1099		
11 1400 125 010	• 125	2,6/1,6	20/12,7	24 WZ	15°	-	-	
11 1400 125 020	• 125	2,6/1,6	20/12,7	36 WZ	10°	-	-	
11 1400 130 010	• 130	2,6/1,6	20/16	24 WZ	15°	-	-	
11 1400 130 020	• 130	2,6/1,6	20/16	36 WZ	10°	-	-	
-	• 136	1,8/1,2	20/10	14/30/48	-	Siehe/See Art. 11 1425 Seite/Page 1099		
11 1400 140 010	• 140	2,6/1,6	20	12 WZ	20°	-	-	
11 1400 140 020	• 140	2,6/1,6	20	20 WZ	15°	-	-	
11 1400 140 030	• 140	2,6/1,6	20	36 WZ	10°	-	-	
11 1400 150 010	• 150	2,6/1,6	20/16	12 WZ	20°	2-6-32	-	
11 1400 150 020	• 150	2,6/1,6	20/16	24 WZ	15°	2-6-32	-	
11 1400 150 030	• 150	2,6/1,6	20/16	36 WZ	10°	2-6-32	-	
11 1400 150 040	• 150	2,6/1,6	20/16	48 WZ	10°	2-6-32	-	
11 1400 150 045	• 150	2,6/1,6	22	24 WZ	15°	Lamello	-	
11 1400 150 050	% 150	2,6/1,6	30	12 WZ	20°	-	-	
11 1400 150 060	• 150	2,6/1,6	30	24 WZ	15°	-	-	
11 1400 150 070	• 150	2,6/1,6	30	36 WZ	10°	-	-	
11 1400 150 080	• 150	2,6/1,6	30	48 WZ	10°	-	-	
11 1400 160 010	• 160	2,6/1,6	20/16	12 WZ	20°	2-6-32	-	
11 1400 160 020	• 160	2,6/1,6	20/16	24 WZ	15°	2-6-32	-	
11 1400 160 030	• 160	2,6/1,6	20/16	36 WZ	10°	2-6-32	-	
11 1400 160 040	• 160	2,6/1,6	20/16	48 WZ	10°	2-6-32	-	
11 1400 160 050	• 160	2,6/1,6	30	12 WZ	20°	2-7-42	-	
11 1400 160 060	• 160	2,6/1,6	30	24 WZ	15°	2-7-42	-	
11 1400 160 070	• 160	2,6/1,6	30	36 WZ	10°	2-7-42	-	
11 1400 160 080	• 160	2,6/1,6	30	48 WZ	10°	2-7-42	-	
11 1400 165 010	• 165	2,6/1,6	20	24 WZ	15°	2-6-32	-	
11 1400 165 020	• 165	2,6/1,6	20	36 WZ	10°	2-6-32	-	
11 1400 165 030	• 165	2,6/1,6	20	48 WZ	10°	2-6-32	-	
11 1400 170 010	• 170	2,6/1,6	20/16	24 WZ	15°	-	-	
11 1400 170 020	• 170	2,6/1,6	30	24 WZ	15°	2-7-42	-	
11 1400 170 030	• 170	2,6/1,6	30	36 WZ	15°	2-7-42	-	
11 1400 170 040	• 170	2,6/1,6	30	48 WZ	10°	2-7-42	-	
11 1400 180 010	• 180	2,8/1,8	20/16	14 WZ	20°	2-6-32	-	
11 1400 180 020	• 180	2,8/1,8	20/16	24 WZ	20°	2-6-32	-	
11 1400 180 030	• 180	2,8/1,8	20/16	40 WZ	15°	2-6-32	-	
11 1400 180 040	• 180	2,8/1,8	20/16	56 WZ	10°	2-6-32	-	
11 1400 180 043	% 180	2,5/1,4	22	12 WZ	20°	Lamello	-	
11 1400 180 046	• 180	2,8/1,8	22	24 WZ	20°	Lamello	-	
11 1400 180 050	• 180	2,8/1,8	30	14 WZ	20°	2-7-42	-	
11 1400 180 060	• 180	2,8/1,8	30	24 WZ	20°	2-7-42	-	
11 1400 180 070	• 180	2,8/1,8	30	40 WZ	15°	2-7-42	-	
11 1400 180 080	• 180	2,8/1,8	30	56 WZ	10°	2-7-42	-	
11 1400 185 010	• 185	2,8/1,8	20/16	14 WZ	20°	2-6-32	-	
11 1400 185 020	• 185	2,8/1,8	20/16	24 WZ	20°	2-6-32	-	
11 1400 185 030	• 185	2,8/1,8	20/16	40 WZ	15°	2-6-32	-	
11 1400 185 040	• 185	2,8/1,8	20/16	56 WZ	10°	2-6-32	-	
11 1400 190 010	• 190	2,8/1,8	20/16	16 WZ	20°	2-6-32	-	
11 1400 190 020	• 190	2,8/1,8	20/16	30 WZ	15°	2-6-32	-	
11 1400 190 030	• 190	2,8/1,8	20/16	48 WZ	10°	2-6-32	-	
11 1400 190 040	• 190	2,8/1,8	20/16	60 WZ	10°	2-6-32	-	
11 1400 190 050	• 190	2,8/1,8	30	16 WZ	20°	2-7-42	-	
11 1400 190 060	• 190	2,8/1,8	30	30 WZ	15°	2-7-42	-	
11 1400 190 070	• 190	2,8/1,8	30	48 WZ	10°	2-7-42	-	
11 1400 190 080	• 190	2,8/1,8	30	60 WZ	10°	2-7-42	-	
11 1400 200 010	• 200	2,8/1,8	30	18 WZ	20°	2-7-42	-	
11 1400 200 020	• 200	2,8/1,8	30	30 WZ	15°	2-7-42	-	
11 1400 200 030	• 200	2,8/1,8	30	48 WZ	10°	2-7-42	-	
11 1400 200 040	• 200	2,8/1,8	30	64 WZ	10°	2-7-42	-	

% Sonderpreis / Sale Artikel. Lieferbar solange Vorrat.

Special price / sale article. While stocks last.

UNI = 2-7-42 + 2-9-46,40 + 2-10-60. Fortsetzung nächste Seite / Continue to next page

11 1400

Handkreissägen
Portable circular saws

Bestseller – preisreduziert · Bestseller – price reduced

Art.							
11 1400 210 010	• 210	2,8/1,8	30	18 WZ	20°	2-7-42	-
-	• 210	2,0/1,4	30	20/48/64 WZ	-	Siehe/See Art. 11 1425 Seite/Page 1099	-
11 1400 210 020	• 210	2,8/1,8	30	30 WZ	15°	2-7-42	-
11 1400 210 030	• 210	2,8/1,8	30	48 WZ	10°	2-7-42	-
11 1400 210 040	• 210	2,8/1,8	30	64 WZ	10°	2-7-42	-
-	• 216	Siehe Tabelle nach Ø und Anwendung (Index)/See table according Ø and application (index)					
11 1400 220 010	• 220	2,8/1,8	30	20 WZ	20°	2-7-42	-
11 1400 220 020	• 220	2,8/1,8	30	36 WZ	15°	2-7-42	-
11 1400 220 030	• 220	2,8/1,8	30	48 WZ	15°	2-7-42	-
-	• 220	2,0/1,4	30	48 WZ	-	Siehe/See Art. 11 1425 Seite/Page 1099	-
11 1400 220 040	• 220	2,8/1,8	30	64 WZ	10°	2-7-42	-
11 1400 225 010	• 225	2,8/1,8	30	24 WZ	20°	2-7-42	-
-	• 225	2,0/1,4	30	24/48/68 WZ	-	Siehe/See Art. 11 1425 Seite/Page 1099	-
11 1400 225 020	• 225	2,8/1,8	30	36 WZ	15°	2-7-42	-
11 1400 225 030	• 225	2,8/1,8	30	48 WZ	15°	2-7-42	-
11 1400 225 040	• 225	2,8/1,8	30	64 WZ	10°	2-7-42	-
11 1400 230 010	• 230/235	2,8/1,8	30	24 WZ	20°	2-7-42	-
-	• 230/235	2,0/1,4	30	24/48/68 WZ	-	Siehe/See Art. 11 1425 Seite/Page 1099	-
11 1400 230 020	• 230/235	2,8/1,8	30	36 WZ	15°	2-7-42	-
11 1400 230 030	• 230/235	2,8/1,8	30	48 WZ	15°	2-7-42	-
11 1400 230 040	• 230/235	2,8/1,8	30	64 WZ	10°	2-7-42	-
11 1400 240 010	• 240	3,0/2,0	30	24 WZ	20°	2-7-42	-
11 1400 240 020	• 240	3,0/2,0	30	36 WZ	15°	2-7-42	-
11 1400 240 030	• 240	3,0/2,0	30	48 WZ	15°	2-7-42	-
-	• 250	Siehe Tabelle nach Ø und Anwendung (Index)/See table according Ø and application (index)					
11 1400 255 010	• 255	3,0/2,0	30	36 WZ	15°	UNI	-
11 1400 255 020	• 255	3,0/2,0	30	48 WZ	15°	UNI	-
11 1400 255 030	• 255	3,0/2,0	30	64 WZ	10°	UNI	-
11 1400 255 040	• 255	3,0/2,0	30	80 WZ	10°	UNI	-
11 1400 260 010	• 260	3,2/2,2	30	24 WZ	20°	UNI	-
-	• 260	2,2/1,6	30	30/56/80 WZ	-	Siehe/See Art. 11 1425 Seite/Page 1099	-
11 1400 260 020	• 260	3,2/2,2	30	48 WZ	15°	UNI	-
11 1400 260 030	• 260	3,2/2,2	30	64 WZ	10°	UNI	-
11 1400 270 010	• 270	3,2/2,2	30	24 WZ	20°	UNI	-
-	• 270	2,2/1,6	30	30/56/80 WZ	-	Siehe/See Art. 11 1425 Seite/Page 1099	-
11 1400 270 020	• 270	3,2/2,2	30	48 WZ	15°	UNI	-
11 1400 270 030	• 270	3,2/2,2	30	80 WZ	10°	UNI	-
11 1400 280 010	• 280	3,2/2,2	30	48 WZ	15°	UNI	-
11 1400 280 020	• 280	3,2/2,2	30	64 WZ	10°	UNI	-
-	• 300	Siehe Tabelle nach Ø und Anwendung (Index)/See table according Ø and application (index)					
11 1400 330 010	• 330	3,2/2,2	30	24 WZ	20°	UNI	-
11 1400 330 020	• 330	3,2/2,2	30	40 WZ	20°	UNI	-
11 1400 330 030	• 330	3,2/2,2	30	60 WZ	15°	UNI	-
11 1400 335 010	• 335	3,2/2,2	30	36 WZ	20°	UNI	-
11 1400 335 020	• 335	3,2/2,2	30	60 WZ	15°	UNI	-
-	• 350	Siehe Tabelle nach Ø und Anwendung (Index)/See table according Ø and application (index)					
11 1400 355 010	• 355	3,2/2,2	30	30 WZ	20°	UNI	-
11 1400 355 020	• 355	3,2/2,2	30	60 WZ	15°	UNI	-

● Gefertigt/Manufactured 232,50 mm · UNI = 2-7-42 + 2-9-46,40 + 2-10-60